
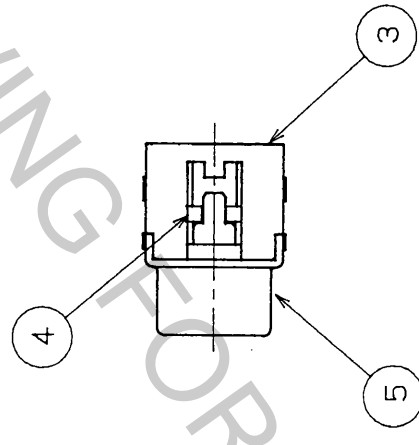
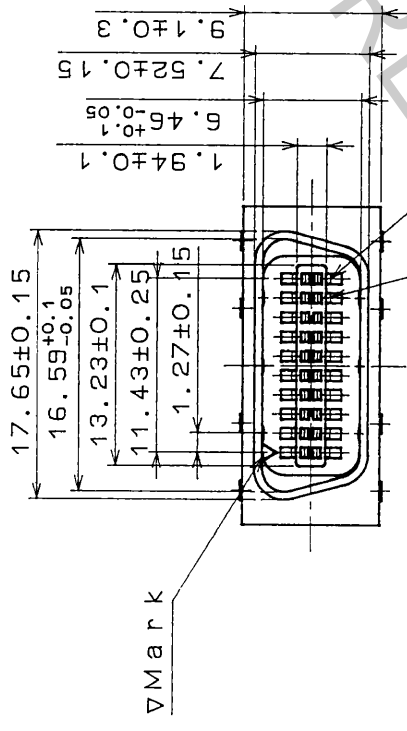
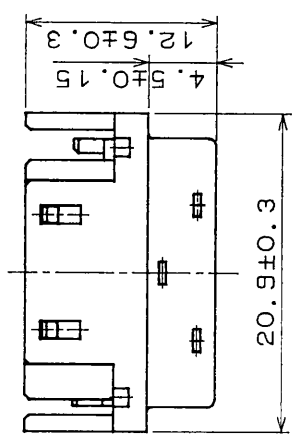
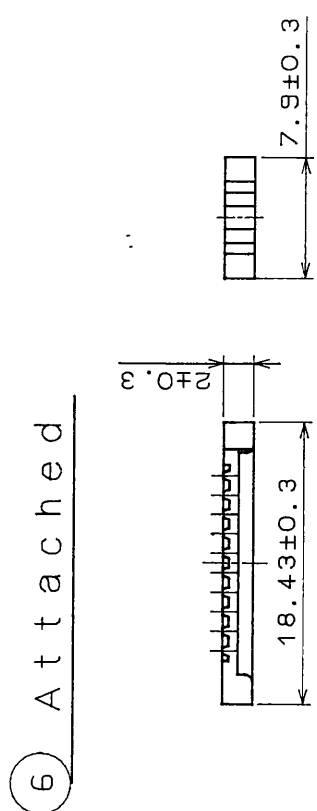


REVISIONS	BY	CHKD	DATE	REVISIONS	BY	CHKD	DATE
△				△			
△				△			
△				△			

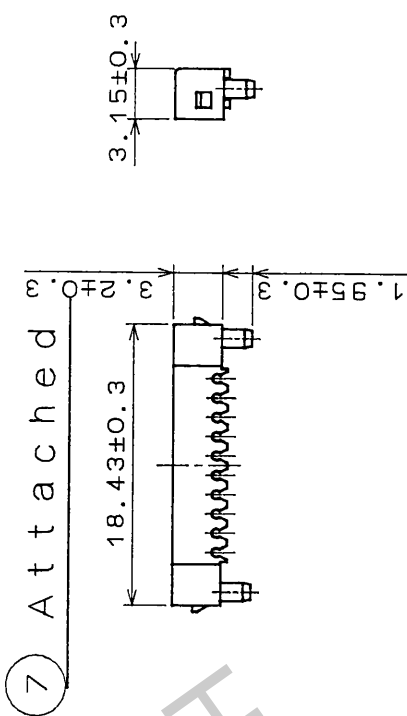

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
4	PBT	(Including glass)UL94V-0	7	PBT	(Including glass)UL94V-0
3	PBT	(Including glass)UL94V-0	6	PBT	(Including glass)UL94V-0
2	Beryllium copper	Contact part:Gold plated Insulation depress part:Gold plated	5	Steel	Nickel plated
1	Beryllium copper	Contact part:Gold plated Insulation depress part:Gold plated			

APPROVED	REVIEWED	CHECKED	DESIGNED	DRAWN
A. Nakagawa	S. Kikuta	M. Nakamura	N. NISHIMATU	ADIC

GENERAL DIMENSION TOLERANCE	APPEARANCE
6 or Less ±0.3	10.4.74
6 to 18 ±0.5	10.4.90
18 to 50 ±0.7	10.4.90
50 to 125 ±1	10.4.90
125 to 250 ±1.3	
ANGULAR ±1°	

UNITS	SCALE
mm	2:1

ISSUED BY	PART NO.	CODE
HRS HIROSE ELECTRIC CO., LTD.	DX30AM-20P	CL230450257H