

## Surge protection device - PT 2X1-VF-230AC - 2805460

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Rail-mountable surge arrester for higher signal voltages. Protective circuit free of leakage current for two floating signals.  
Nominal voltage: 230 V AC

Illustration shows variant PT 2X1-VF-120AC

### Product Features

- ✓ Plugs can be checked with CHECKMASTER
- ✓ Maximum ease of maintenance thanks to the two-piece design
- ✓ Base element remains an integral part of the installation
- ✓ Protective devices for use in telecommunications and signaling networks according to IEC 61643-21
- ✓ Consistent plug-in signal circuit protection
- ✓ Impedance-neutral disconnection of plug for test and maintenance purposes



### Key commercial data

Packing unit	1 pc
Weight per Piece (excluding packing)	72.0 GRM
Custom tariff number	85363010
Country of origin	Germany

### Technical data

#### Dimensions

Height	90 mm
Width	17.7 mm
Depth	65.5 mm
Horizontal pitch	1 Div.
Complete module height	90 mm

## Surge protection device - PT 2X1-VF-230AC - 2805460

### Technical data

#### Dimensions

Complete module width	17.7 mm
Complete module depth	65.5 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 80 °C
Degree of protection	IP20

#### General

Housing material	PA 6.6
Inflammability class according to UL 94	V0
Color	black
Mounting type	DIN rail: 35 mm
Type	DIN rail module, two-section, divisible
Number of positions	2
Direction of action	Line-Line & Line-Earth Ground

#### Protective circuit

IEC test classification	C1
	C2
	C3
	D1
Nominal voltage $U_N$	230 V AC
	250 V AC
Maximum continuous voltage $U_C$ (wire-ground)	250 V AC
Nominal current $I_N$	6 A
Operating effective current $I_C$ at $U_C$	$\leq 2 \mu A$
Residual current $I_{PE}$	$\leq 2 \mu A$ (at $U_N$ )
Nominal discharge current $I_n$ (8/20) $\mu s$	3 kA
Nominal discharge current $I_n$ (8/20) $\mu s$ (Core-Earth)	3 kA
Total surge current (8/20) $\mu s$	8 kA
Total surge current (10/350) $\mu s$	1 kA
Max. discharge current $I_{max}$ (8/20) $\mu s$	8 kA
Max. discharge current $I_{max}$ (8/20) $\mu s$ maximum (Core-Earth)	8 kA
Nominal pulse current $I_{an}$ (10/1000) $\mu s$ (Core-Earth)	100 A
Impulse discharge current (10/350) $\mu s$ , peak value $I_{imp}$	500 A
Output voltage limitation at 1 kV/ $\mu s$ (Core-Earth) static	$\leq 1.4$ kV
Residual voltage at $I_n$ , (conductor-conductor)	$\leq 2$ kV
Residual voltage at $I_n$ , (conductor-ground)	$\leq 1$ kV

## Surge protection device - PT 2X1-VF-230AC - 2805460

### Technical data

#### Protective circuit

Residual voltage with I <sub>an</sub> (10/1000)μs (conductor-conductor)	≤ 1.4 kV
Residual voltage with I <sub>an</sub> (10/1000)μs (conductor-ground)	≤ 700 V
Energy absorption	150 J
Voltage protection level U <sub>p</sub> (Core-Core)	≤ 2.5 kV (C2 (4 kV/2 kA))
	≤ 1.8 kV (C3 - 100 A)
	≤ 2.6 kV (D1 - 500 A)
Voltage protection level U <sub>p</sub> (Core-Earth)	≤ 1.1 kV (C1 - 500 A)
	≤ 1.5 kV (C2 (4 kV/2 kA))
	≤ 1.6 kV (C3 - 100 A)
	≤ 1.8 kV (D1 - 500 A)
Response time t <sub>A</sub>	≤ 100 ns
Capacity (Core-Core)	typ. 4.5 pF
Capacity (Core-Earth)	typ. 9 pF
Resistance in series	0 Ω
Surge protection fault message	None
Max. required back-up fuse	6 A (gL / gG)
Surge carrying capacity in acc. with IEC 61643-21 (Core-Earth)	C2 (4 kV / 2 kA)
	C3 (100 A)
	D1 (500 A)

#### Connection data

Connection method	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

#### Connection, equipotential bonding

Connection method	Screw connection
Tightening torque, min	0.8 Nm

#### Standards and Regulations

# Surge protection device - PT 2X1-VF-230AC - 2805460

## Technical data

### Standards and Regulations

Standards/regulations	DIN EN 61643-21
-----------------------	-----------------

## Classifications

### eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130807

### ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

### UNSPSC

UNSPSC 6.01	30212010
UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

## Approvals

### Approvals

---

Approvals

GOST

---

Ex Approvals

---

Approvals submitted

# Surge protection device - PT 2X1-VF-230AC - 2805460


## Approvals

### Approval details



## Drawings

Circuit diagram

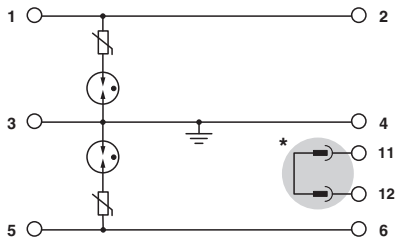

\* Circuit only closed when plug is inserted.

Dimensioned drawing

